

FLOOR STAND OUTDOOR DIGITAL SIGNAGE

ADO Series



21.5" | 32" | 43" | 49" | 55" | 65" | 75" | 86"



ADO SERIES

Floor stand outdoor digital signage

Screen Size

21.5" | 32" | 43" | 49" | 55" | 65" | 75" | 86"

Resolution

1920x1080 / 3840x2160

Aspect Ratio

16:9

Brightness

1500~3000cd/m²

Contrast Ratio

3500:1


Protection Grade

IP55

viewing angle

178°(H)/178°(V)

OPTIONAL SIZES

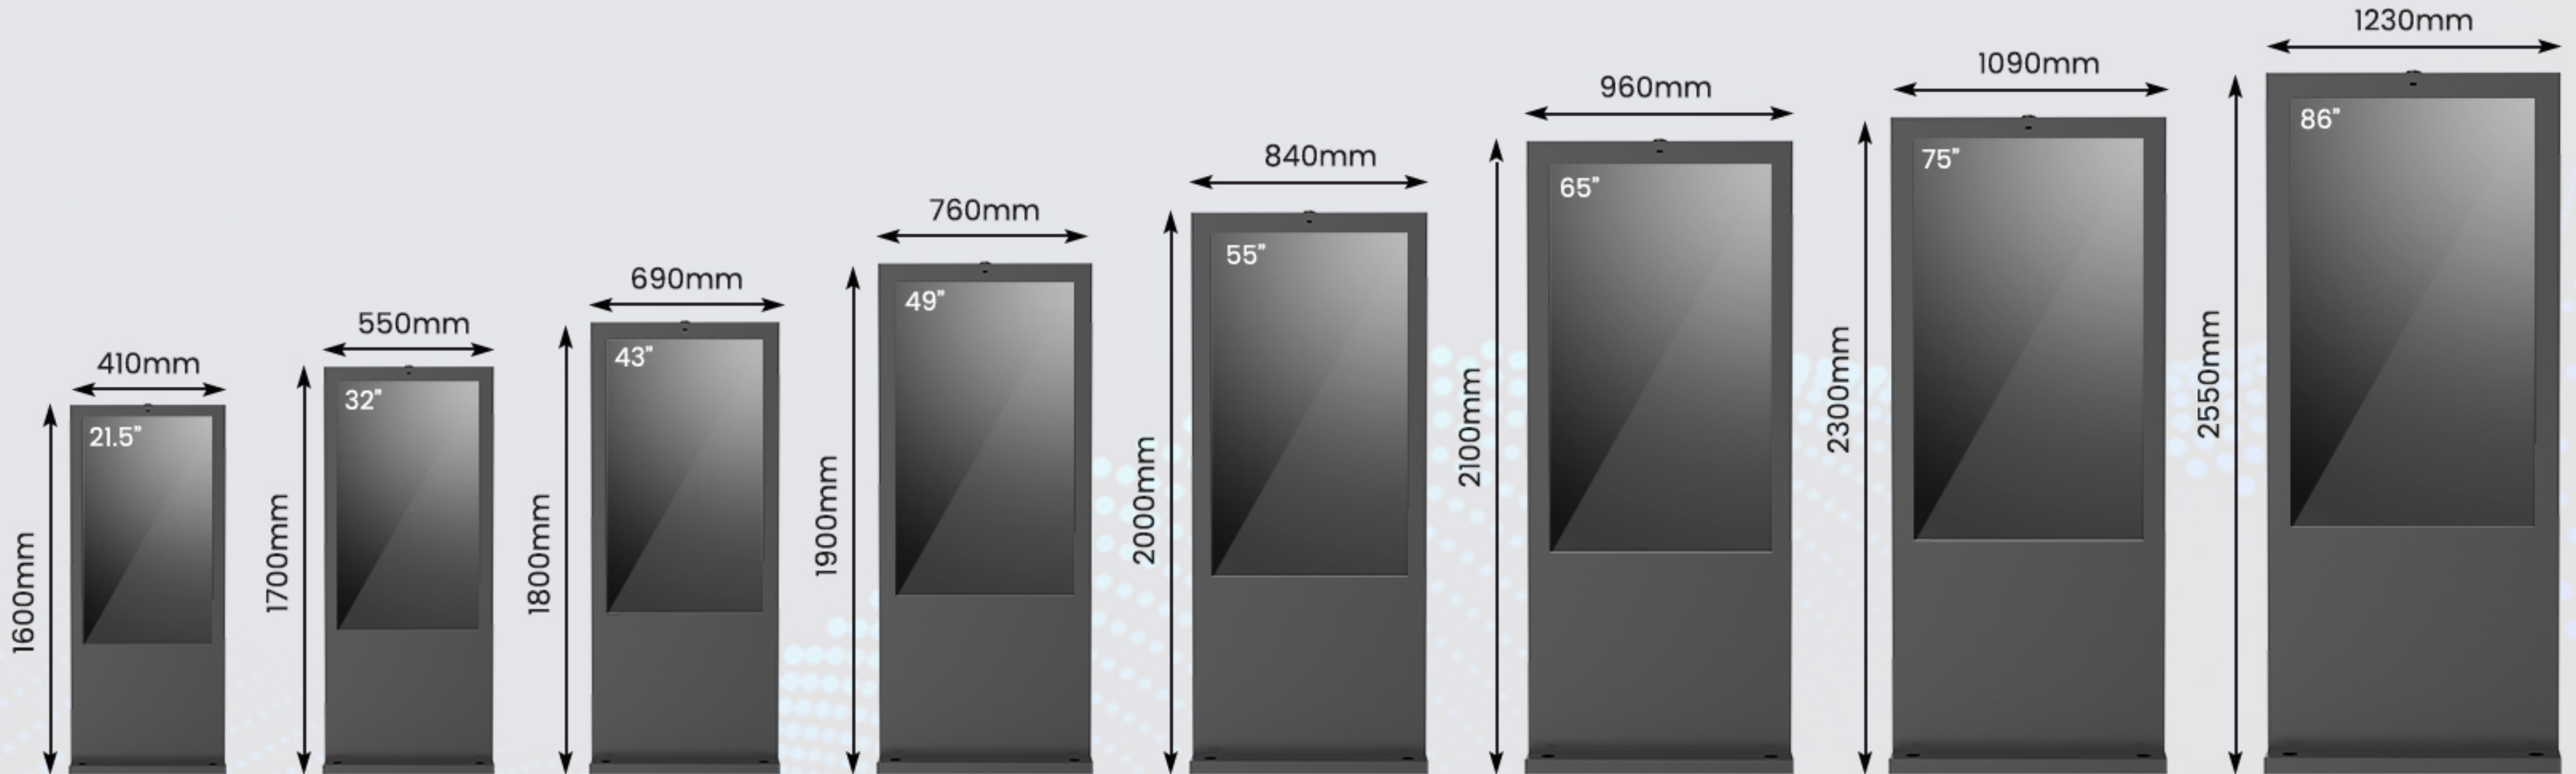

ANDROID/WINDOWS OS OPTIONAL

We provide flexible Operation System according to different applications



Windows os



Android os


IP55 WATERPROOF

IP55 which can be waterproof, dustproof, sun resistant coldresistant, anti-corrosion and anti-theft, so it can be usedstably and reliably in almost all kinds of outdoor weather



EXPLOSION PROOF GLASS

Using 5-8mm high transparency tempered glass, with a transmittance of $\geq 96\%$, high transparency, anti reflection, tempered explosion-proof

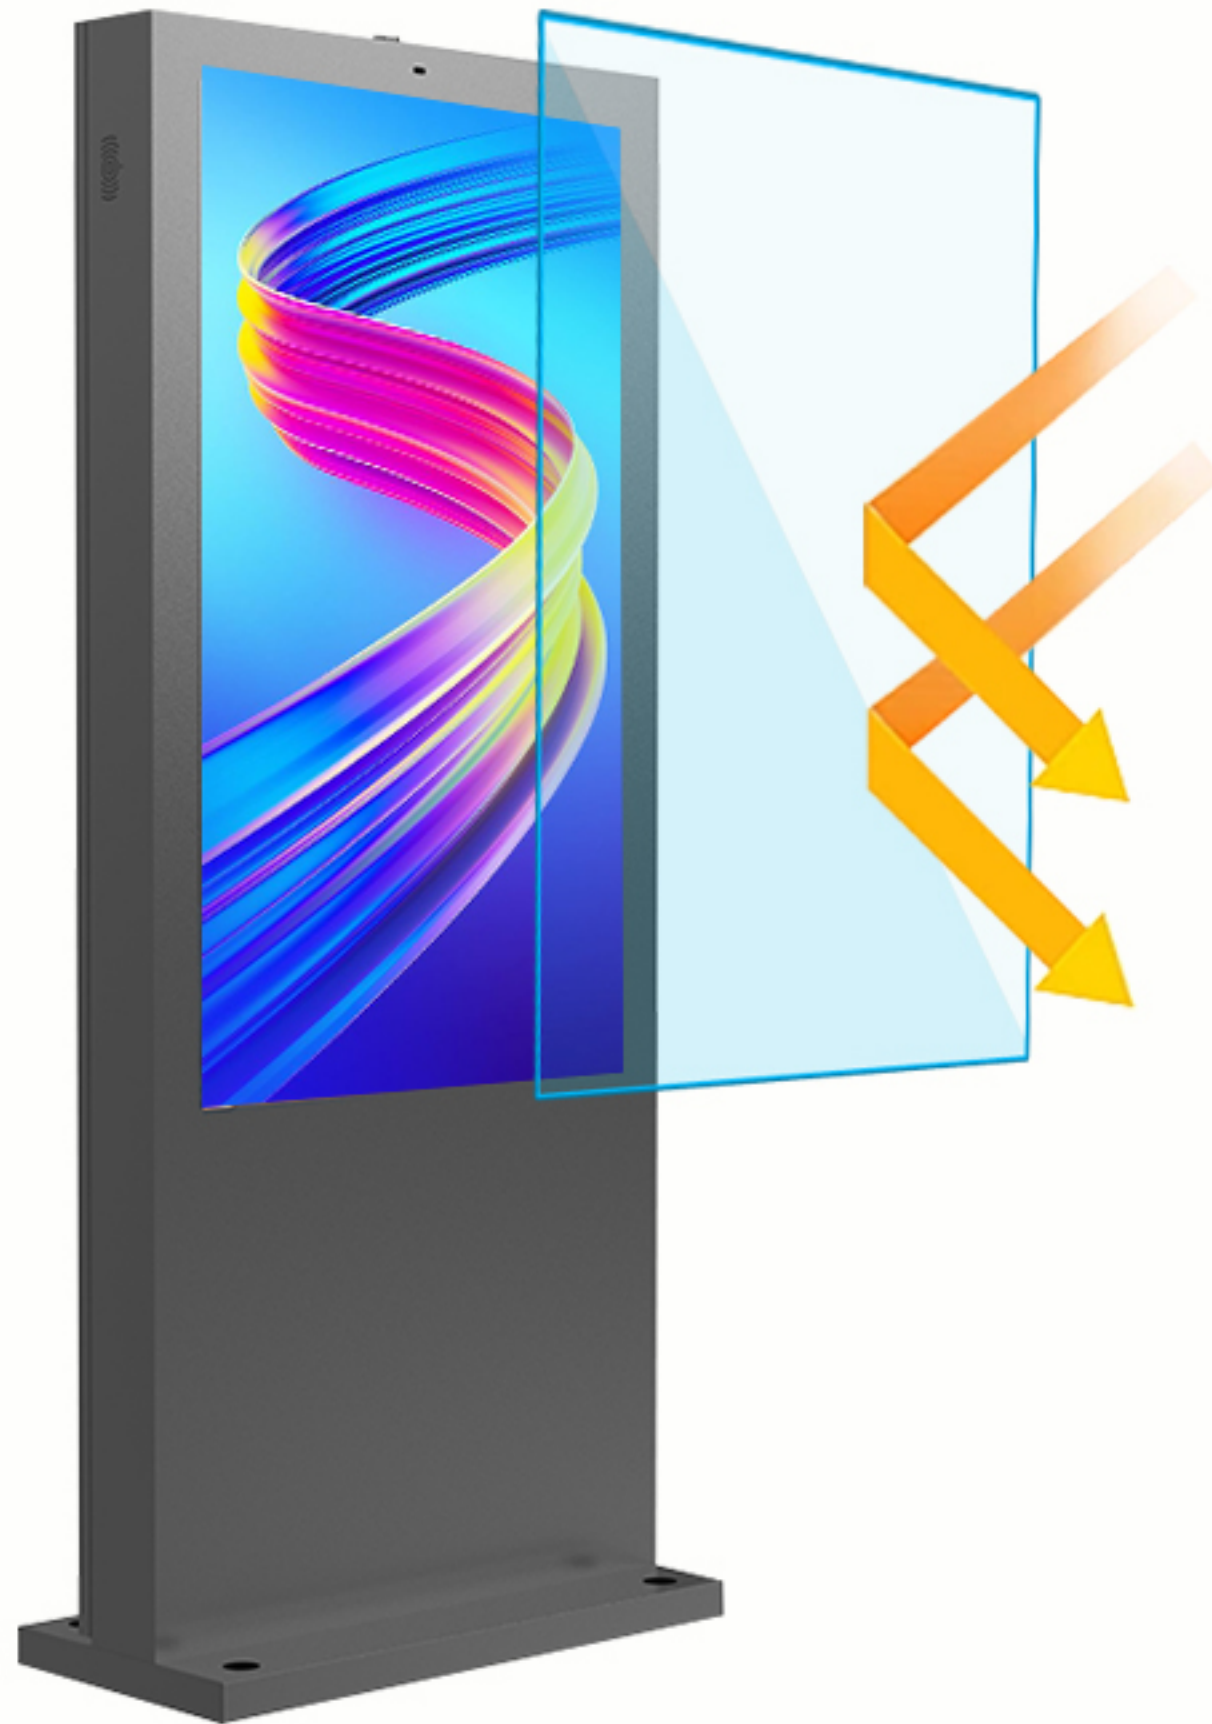

5-8mm
Tempered Glass



$\geq 96\%$
Transmittance

GOOD HEAT DISSIPATION EFFECT

Optional air cooling and air conditioning cooling







**Air-Cooled
Heat Dissipation**



**Air Conditioning
Heat Dissipation**

INTELLIGENT SPLIT SCREEN

Multiple split screen mode,pictures and videos can be played simultaneous.

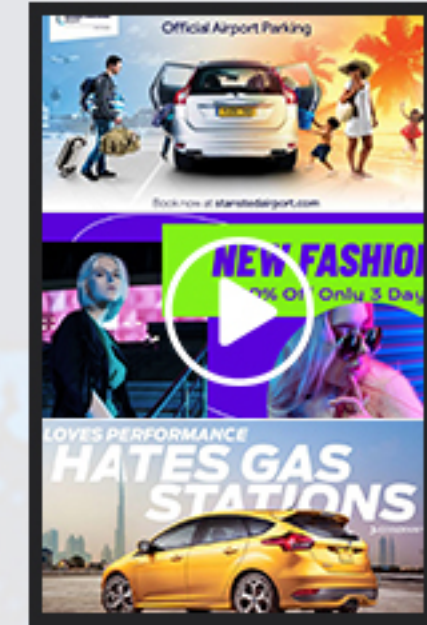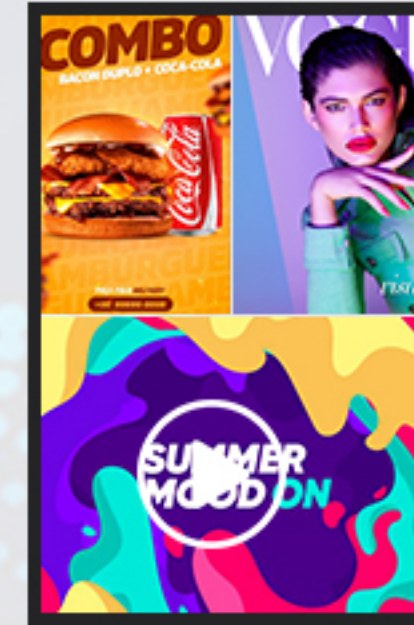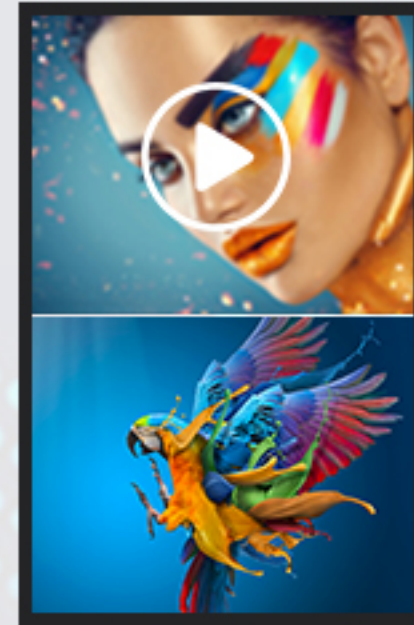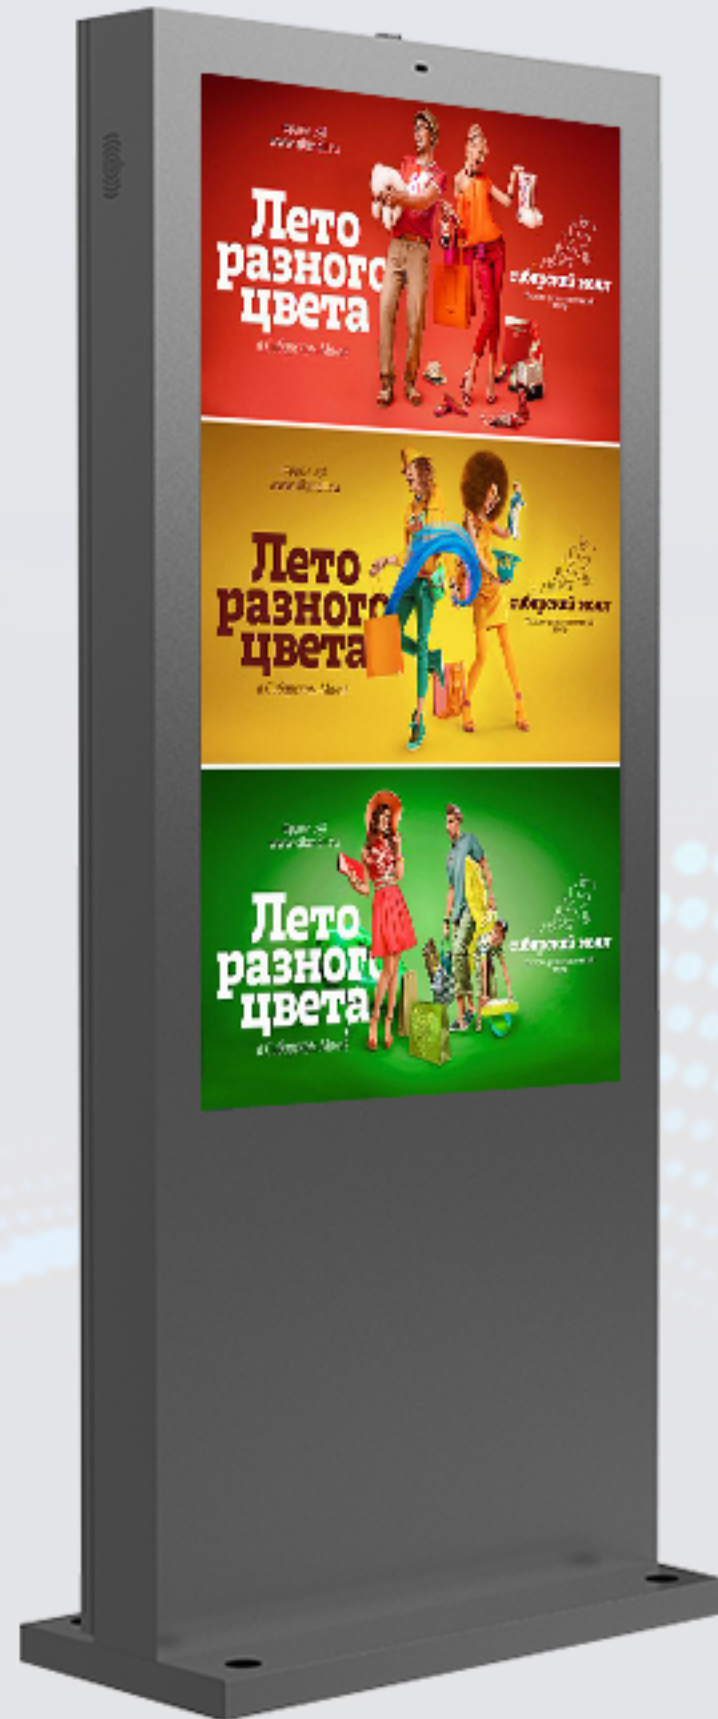

...

INTELLIGENT LIGHT SENSOR

can automatically adjust the brightness of LCD screen according to the external light brightness, so as to reduce the power consumption to the greatest extent, save energy and protect the environment



Bright




Dark

Automatic Light Brightness

OPTIONAL TOUCH

Adapt sensitive 10 dots PCAP touch screen bring you sensitive

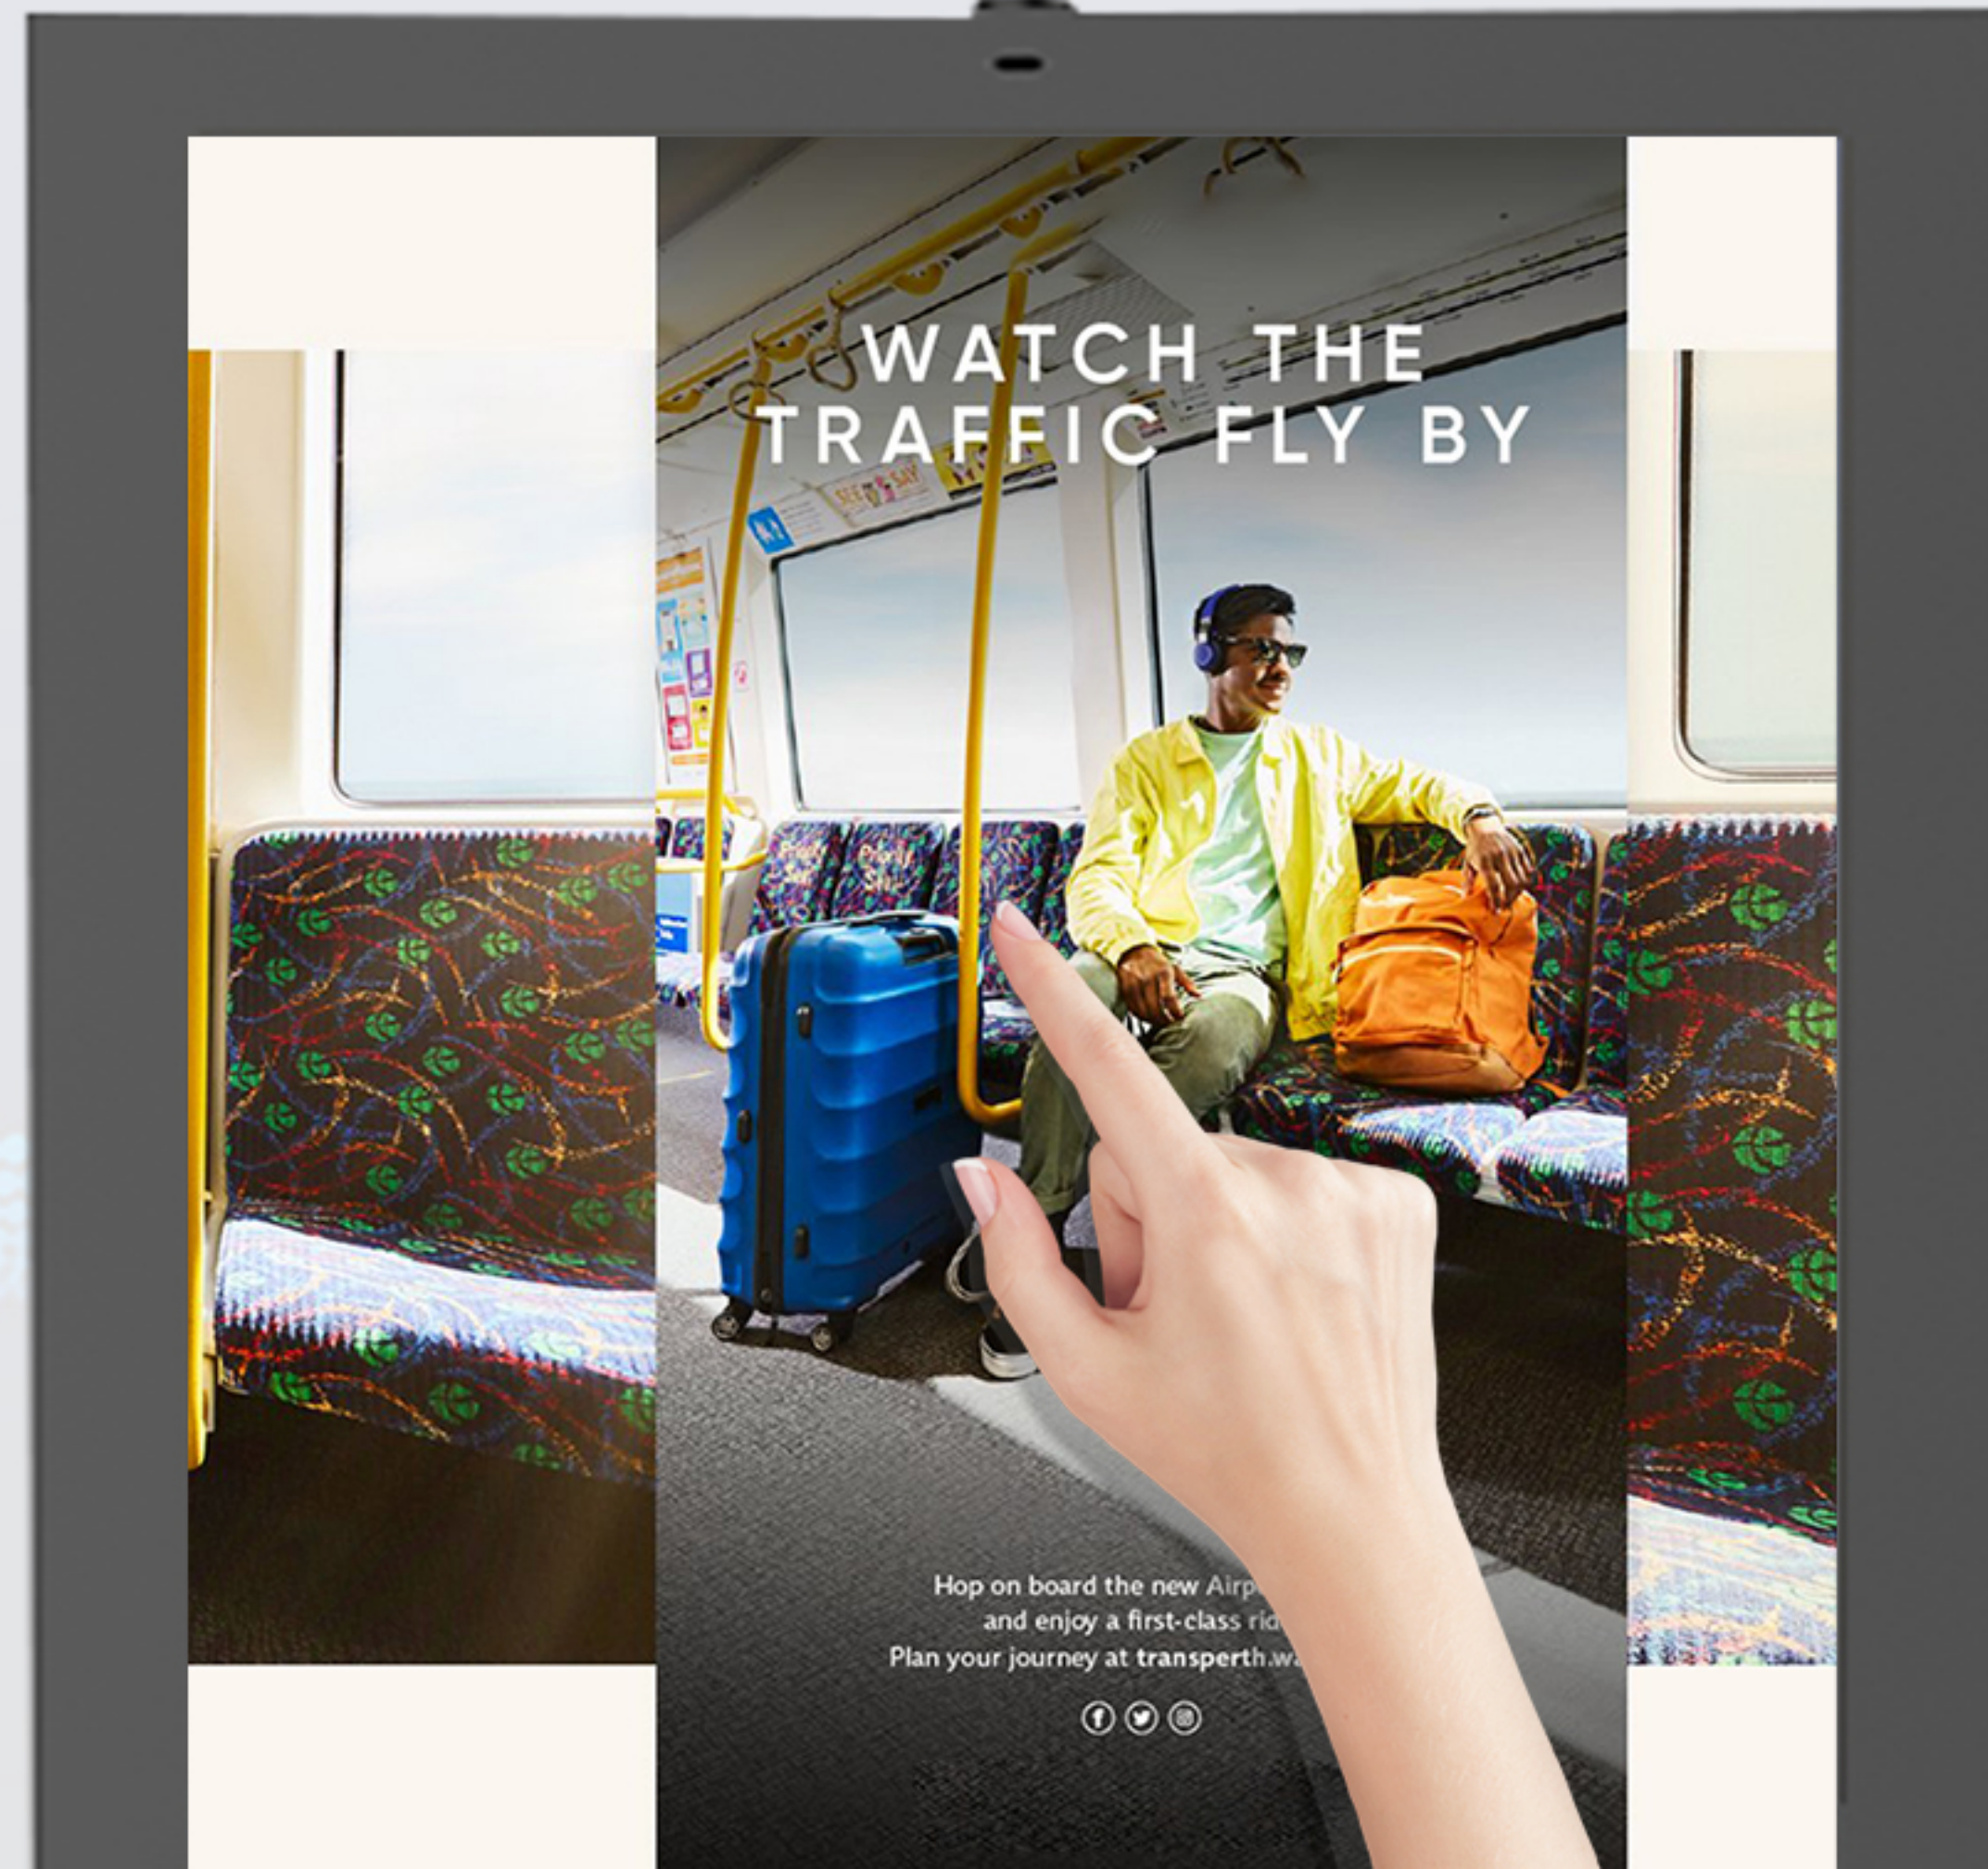

ULTRA HIGH BRIGHTNESS DISPLAY

1500~3500nits high brightness ,high temperature resistance -20 °C to+50 °C



1500~3500nits

High brightness


-20°C~+50°C

High temperature resistance

CMS

CONTENT MANAGEMENT SYSTEM

Supports remote management of many terminals through cloud software and realizes many tasks such as advertisement publishing, updating and deleting, etc.

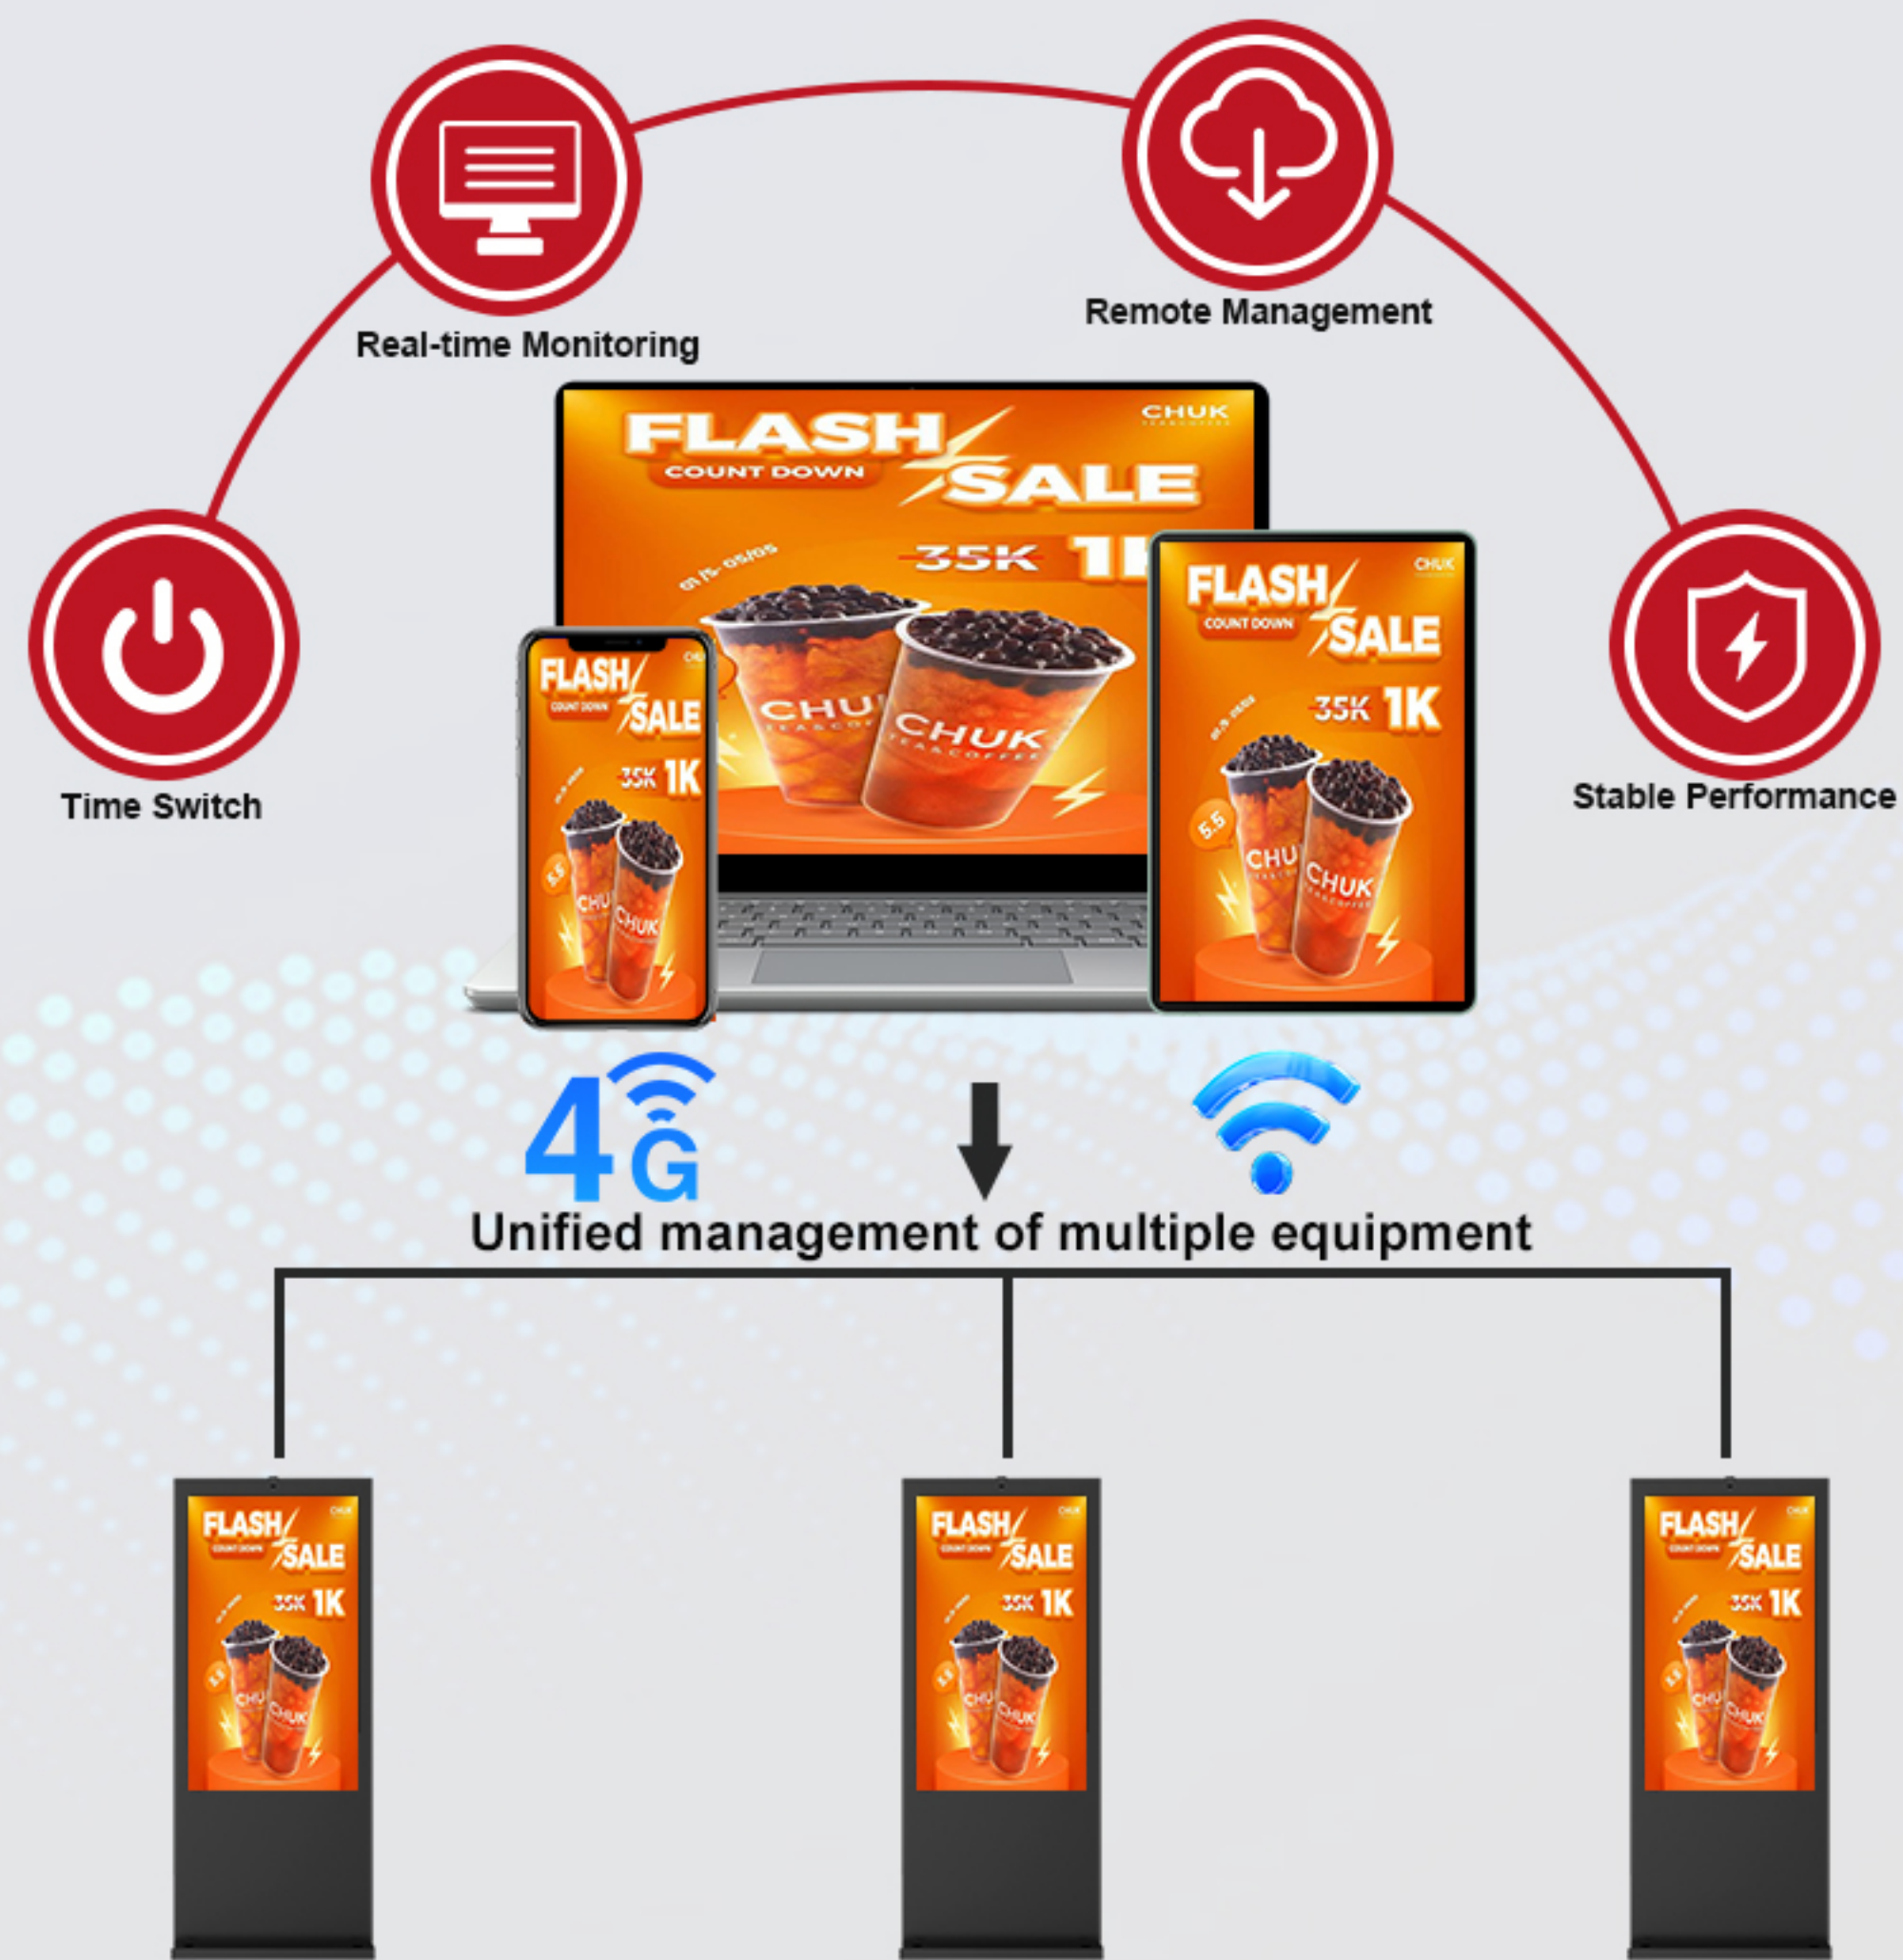

4K DISPLAY OPTIONAL

Using a 3840 * 2160P full HD resolution to present natural colors, delicate and rich picture quality enjoy a clear visual experience!



CUSTOMIZABLE COLORS

Black



White



Yellow



Blue



Orange



Green



SPECIFICATIONS

LCD Screen Size:	21.5"/32"/ 43"/ 49"/ 55"/ 65"/75"/86"
Panel Type	TFT-LCD screen & LED backlight
Panel Brand:	LG\BOE\AUO
Aspect Ratio:	16 : 9
Resolution:	1920X1080/3840*2160
Brightness:	1500-3500cd/m² optional
Contrast Ratio:	3500 : 1
Colour	16.7M
viewing angle	89/89/89/89 (Typ.) (CR≥10)
Response Time:	6ms
Lifespan:	50000 hours
Enclosure material:	Aluminum frame / spray cold roll steel sheets body
Menu Language:	Multiple language for option: English (Default)
Voltage Frequency:	AC110-240V optional
Horizon Frequency:	50/60Hz
Working temperature:	-20-50℃
Working humidity:	10%-90% no condensation
Storage temperature:	-20℃ ~60℃
Capacitive touch	Optional
Network	WiFi 802.11b/g/n or support Etherne optional4G network
Android 7.1/9.0/10.0 /11.0 OS optional	
CPU	Quad-core/ Eight-core
RAM	2/4/8GB
ROM	32/64/128GB
Windows10/11 OS optional	
CPU	Intel SOC i3/i5/i7
RAM	4/8/16/32GB
ROM	128/256/512GB

APPLICATIONS



CONTACT US

SHENZHEN DDW TECHNOLOGY CO.,LTD



0086-755-23229716




0086-134-17558100



www.digitalsignages.com



info@ddw.net



2F Building 8, YiLisheng Industry Park, Fuyong
Baoan District, Shenzhen, 518103